

K-MOENIA

DISCREET STYLISH

- Aesthetically pleasing designer housing with integrated wall-wash (flood) optics for Up & Down or left-right illumination
- Ideal for use as wide area wall lighting
- Soft light mixing and uniform light distribution
- Control: ON/OFF (dimming not possible)
- Functionality: Static white light (colour temperature 2,700 K)
- Direct 230 V mains connection
- Mounting: horizontal or vertical



Environment
friendly



Low
consumption



Long
service life





Excellent
CRI



TECHNICAL DATA

K-MOENIA Wall-mounted luminaire

Luminous source	LED module (linear)
Connected load	50 W
Luminous flux	2,240 lm
Colour temperature	2,700 K
CRI	85
Protection category	IP 20
Service lifetime	L80/B10 50,000h
Tests / approvals	CE / RoHs Conformity
Weight	2.3 kg
Operating voltage	230 VAC
Protection class	II
Mounting	Surface-mounted (wall)

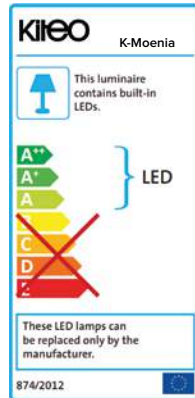

Dimensions

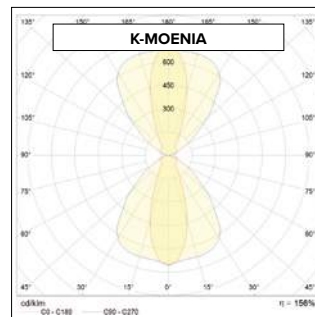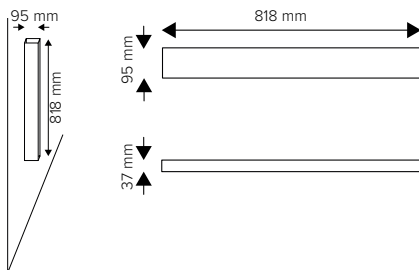

ORDER DATA

Art.No.	Luminaire
K-MO30301	K-Moenia wall-mounted luminaire / Fixed White / 30° frosted optic / White (RAL 9003)
K-MO30304	K-Moenia wall-mounted luminaire / Fixed White / 30° frosted optic / Brushed aluminium

PI-LED Variant available on request.

Art.No.	Accessory
K-ZMO30001	Aluminium wall spacers, 10 mm, 2 pcs.

Notes

All luminaire specifications are subject to a tolerance of +/- 15%; all electrical data is subject to a tolerance of +/-15%. Unless otherwise specified, the values are based on 3,000 K and an ambient temperature of 25°C. Permissible operating temperature 10°C to 35°C. The manufacturer reserves the right to change any product specification without prior notice. More documents can be found at www.kiteo.eu.