

K-MOTUS

SMALL, SMALLER, BEST

- Compact Downlight
- Small construction size
- Soft light mixing and uniform light distribution
- 35° rotatable
- Bayonet-lock spring-clip mounting
- Mounting: Flush-mounted



Environment
friendly



Low
consumption



Long
service life



Brightness
dimmable




Excellent
CRI

TECHNICAL DATA


K-MOTUS Recessed luminaire

Luminous source	LED module
Power supply	included (delivery)
Connected load	M: 6.2 W L: 9.1 W
Beam angle	36°
Luminous flux	M: 541 lm L: 918 lm
Colour temperature	3,000 K
CRI	90
Protection category	IP 20
Dimming range	5–100% (Phasenabschnittsdimmer)
Service lifetime	L70 40,000h
Tests / approvals	CE / RoHS Conformity
Weight	0.3 kg
Operating voltage	230 VAC
Control mode	switchable
Protection class	III
Mounting	Flush-mounted

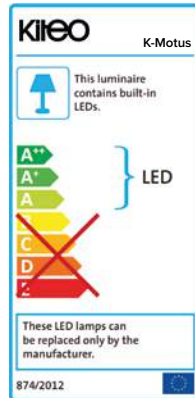


Dimension

K-Motus round



K-Motus square



Matt chromium
 White



K-Motus M



K-Motus L



ORDER DATA

Art.No.	Luminaire
K-MO-L-R-FW-CM.	K-Motus recessed luminaire L round / Fixed White / dimmable (phase cut-off) / matt chrome
K-MO-L-E-FW-CM.	K-Motus recessed luminaire L square / Fixed White / dimmable (phase cut-off) / matt chrome
K-MO-L-R-FW-WH.	K-Motus recessed luminaire L round / Fixed White / dimmable (phase cut-off) / white
K-MO-L-E-FW-WH.	K-Motus recessed luminaire L square / Fixed White / dimmable (phase cut-off) / white
K-MO-M-R-FW-CM.	K-Motus recessed luminaire M round / Fixed White / dimmable (phase cut-off) / matt chrome
K-MO-M-E-FW-CM.	K-Motus recessed luminaire M square / Fixed White / dimmable (phase cut-off) / matt chrome
K-MO-M-R-FW-WH.	K-Motus recessed luminaire M round / Fixed White / dimmable (phase cut-off) / white
K-MO-M-E-FW-WH.	K-Motus recessed luminaire M square / Fixed White / dimmable (phase cut-off) / white

Can be flush mounted in concrete ceiling. Other converters can be provided optionally. Other reflectors can be provided optionally.

Notes

All luminaire specifications are subject to a tolerance of +/- 15%; all electrical data is subject to a tolerance of +/- 15%. Unless otherwise specified, the values are based on 3,000 K and an ambient temperature of 25°C. Permissible operating temperature 10°C to 35°C. The manufacturer reserves the right to change any product specification without prior notice. More documents can be found at www.kiteo.eu.

