

K-VIVERE

THE VERSATILE LIGHTING EXPERT

- Compact Downlight
- Small construction size
- Soft light mixing and uniform light distribution
- Frosted safety glass
- Die cast aluminium housing
- Solid aluminium heat sink
- Mounting: Flush-mounted



Environment
friendly



Low
consumption






Long
service life

TECHNICAL DATA


K-VIVERE Recessed luminaire

Luminous source	LED module
Power supply	included (delivery)
Connected load	4,5 W
Beam angle	40°
Luminous flux	520 lm
Colour temperature	3,000 K
CRI	90
Protection category	IP 44
Service lifetime	L90 50.000h
Tests / approvals	CE / RoHS Conformity
Weight	0,1 kg
Operating voltage	230 VAC
Control mode	Switchable
Protection class	III
Mounting	Flush-mounted

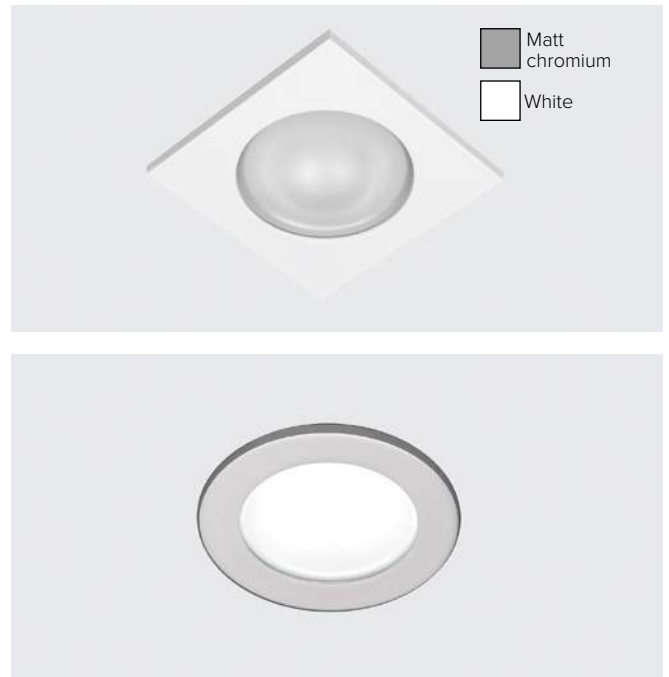
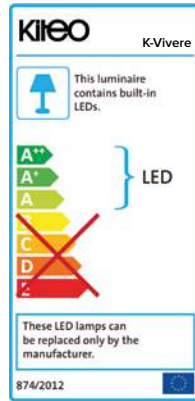


Dimensions

K-Vivere round

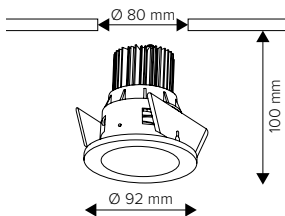

K-Vivere square

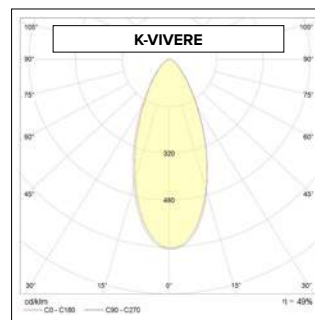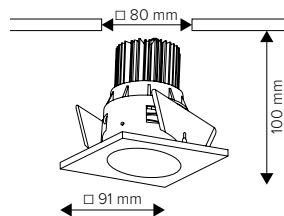

ORDER DATA

Art.No.	Luminaire
K-VE-E-FW-CM	K-Vivere recessed luminaire square / Fixed White / 40° / matt chrome
K-VE-E-FW-WH	K-Vivere recessed luminaire square / Fixed White / 40° / white
K-VE-R-FW-CM	K-Vivere recessed luminaire round / Fixed White / 40° / matt chrome
K-VE-R-FW-WH	K-Vivere recessed luminaire round / Fixed White / 40° / white

Can be flush mounted in concrete ceiling. Only suitable for connection in series. Not for use in indoor swimming pools/wellness zones (where there are chlorine vapours).

Notes

All luminaire specifications are subject to a tolerance of +/- 15%; all electrical data is subject to a tolerance of +/-15%. Unless otherwise specified, the values are based on 3,000 K and an ambient temperature of 25°C. Permissible operating temperature 10°C to 35°C. The manufacturer reserves the right to change any product specification without prior notice. More documents can be found at www.kiteo.eu.